




TECHNICAL SPECIFICATIONS | TRACK-MOUNTED SCREENING PLANT

MOBISCREEN MS 13 Z



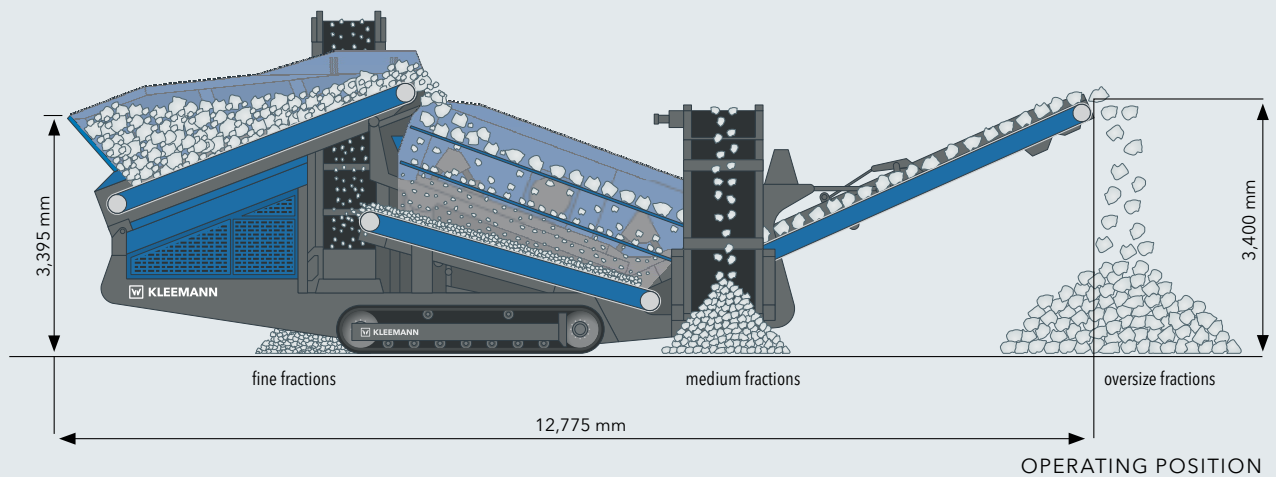

TECHNICAL HIGHLIGHTS

- ▣ Double-deck screening unit
- ▣ Diesel-hydraulic drive
- ▣ Scalping screen
- ▣ Max. feed size: 400 mm

TECHNICAL SPECIFICATIONS MS 13 Z

Feeding unit

Feed capacity up to approx. (t/h)	300
Feed size max. (mm)	400
Feed height (mm)	3,395 (2,920)
Hopper capacity (m ³)	6

Belt conveyor feeder

Width x length (mm)	1,200 x 3,900
Type (optional)	variable speed

Screening unit

Type	double-deck vibration screen
Top deck width x length (mm)	1,370 x 3,660
Bottom deck width x length (mm)	1,370 x 3,455

Belt conveyor underflow material

Width x length (mm)	1,050 x 3,300
---------------------	---------------

Bottom deck underflow discharge conveyor (fine fractions)

Width x length (mm)	800 x 6,800
Discharge height approx. (mm)	3,200 - 3,600

Bottom deck overflow discharge conveyor (medium fractions)

Width x length (mm)	800 x 7,600
Discharge height approx. (mm)	2,600 - 3,600

Top deck overflow discharge conveyor (oversize fractions)

Width x length (mm)	1,200 x 4,600
Discharge height approx. (mm)	3,100 - 3,400

Drive

Drive concept	Diesel-hydraulic drive
Powerpack CAT (Tier 3, 4i,4f) (kW)	75

Transport

Transport height approx. (mm)	3,200
Transport length approx. (mm)	12,775
Transport width approx. (mm)	2,500
Transport weight approx. (kg)	23,000