




TECHNICAL SPECIFICATIONS | TRACK-MOUNTED SCREENING PLANT

# MOBISCREEN MS 14 Z



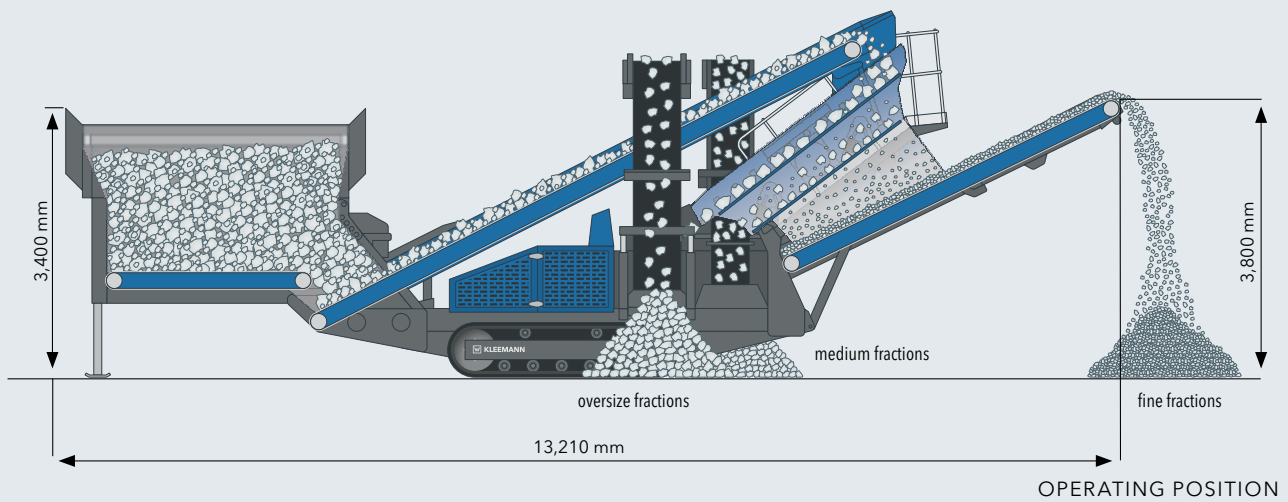

## TECHNICAL HIGHLIGHTS

- Double-deck screening unit
- Diesel-hydraulic drive
- Classifier screen
- Max. feed size: 150 mm

## TECHNICAL SPECIFICATIONS MS 14 Z

### Feeding unit

Feed capacity up to approx. (t/h)	250
Feed size max. (mm)	150
Feed height (mm)	3,400
Hopper capacity (m <sup>3</sup> )	6

### Belt conveyor feeder

Width x length (mm)	900 x 3,200
Type (optional)	variable speed

### Belt conveyor fines fractions

Width x length (mm)	900 x 7,900
---------------------	-------------

### Screening unit

Type	Double-deck vibration screen
Top deck width x length (mm)	1,370 x 3,050
Bottom deck width x length (mm)	1,370 x 2,440

### Bottom deck underflow discharge conveyor (fine fractions)

Width x length (mm)	1,050 x 4,900
Discharge height approx. (mm)	3,800

### Bottom deck overflow discharge conveyor (medium fractions)

Width x length (mm)	650 x 7,900
Discharge height approx. (mm)	4,100

### Top deck overflow discharge conveyor (oversize fractions)

Width x length (mm)	650 x 7,900
Discharge height approx. (mm)	4,100

### Drive

Drive concept	Diesel-hydraulic drive
Powerpack CAT (Tier 3, 4i,4f) (kW)	75

### Transport

Transport height approx. (mm)	3,200
Transport length approx. (mm)	13,210
Transport width approx. (mm)	2,500
Transport weight approx. (kg)	19,500